Product	Flameproof Type (내압) Dustproof Type (분진) Control Switch Box
Model	FOB-1~5 (Flameproof Type / 내압) FOB-TD-1~5 (Dustproof Type / 분진)



Protection Tech. & Hazard Area Classification

Ex d IIB+H2 T6 IP65 for Zone 1/2
Ex tD A21 T85℃ IP65 for Zone 21/22


Ordering Information

FOB · ____ · *

Number of Switch 스위치 수량	1구	2구	3구	4구	5구
	1	2	3	4	5
Principle 방폭구분	Flameproof (d / Gas - IIB+H2)			Dustproof (tD / Dust - A21)	
	(Blank)			TD	
Type 종류	Control Switch Box				
	FOB				

Component : PB, PBL, PL, SS, EM, BZ, VL, AM

Drawing

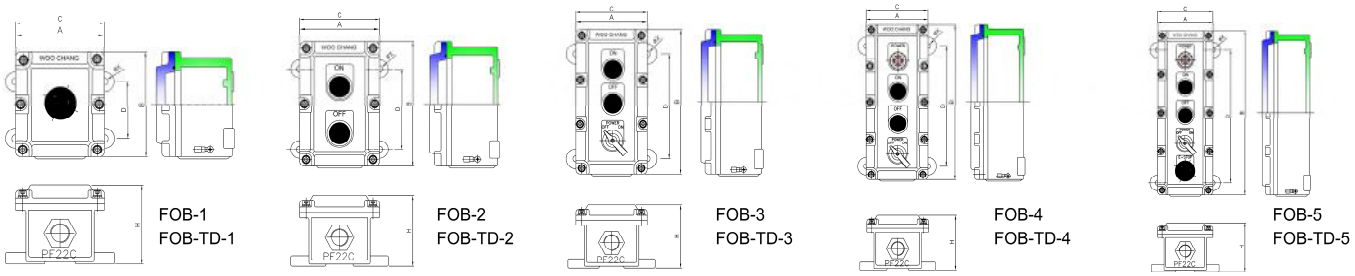

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 600 Vac
Sunshade Cover	STS 304 / EGI	Rated Frequency	50/60 Hz

Box Specification

Model	Box Size	T/B	Switch	Dimension					
	L*W*H	Max	EA	A	B	C	D	X	H
FOB-1 FOB-TD-1	120*140*105	20A	1	120	140	120	75	10	105
FOB-2 FOB-TD-2	120*185*105	20A	2	120	185	120	120	10	105
FOB-3 FOB-TD-3	120*240*105	20A	3	120	240	120	175	10	105
FOB-4 FOB-TD-4	120*295*105	20A	4	120	295	120	230	10	105
FOB-5 FOB-TD-5	120*350*105	20A	5	120	350	120	285	10	105

Hub Type Q'ty

Model	Max. Hub Q'ty (PF, NPT, Metric)									
	Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
FOB-1 FOB-TD-1	Top&Bottom	2	2	1	1	1	-	-	-	-
FOB-2 FOB-TD-2	Top&Bottom	2	2	1	1	1	-	-	-	-
FOB-3 FOB-TD-3	Top&Bottom	2	2	1	1	1	-	-	-	-
FOB-4 FOB-TD-4	Top&Bottom	2	2	1	1	1	-	-	-	-
FOB-5 FOB-TD-5	Top&Bottom	2	2	1	1	1	-	-	-	-