Product	Flameproof Type (내압) Indicator Box (IIB)
Model	IND-23 IND-45 IND-35 IND-46 IND-57 IND-68



Protection Tech. & Hazard Area Classification

Ex d IIB T6 IP65 or IP66for Zone 1/2


Ordering Information

IND - **

Size 크기	220x330	400x500	340x500	400x600	500x700	600x800
	23	45	35	46	57	68
Type 종류	Indicator Box					
	IND					

Component : PB, PBL, PL, SS, EM, BZ, VL, AM

Drawing

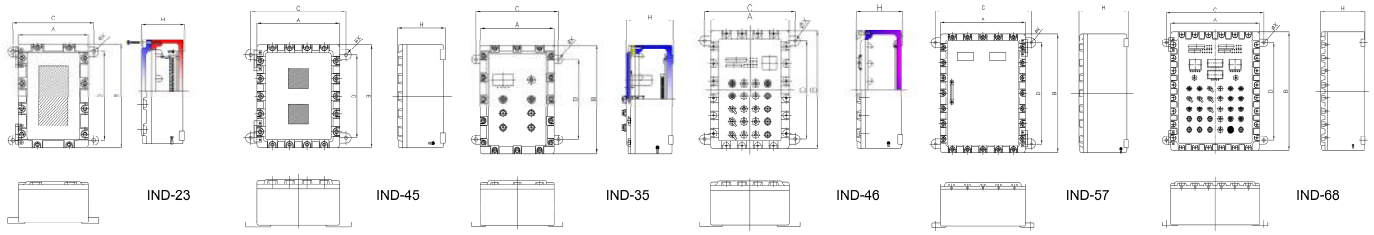

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 600 Vac
Sunshade Cover	STS 304 / EGI	Rated Frequency	50/60 Hz

Box Specification

Model	Box Size	IP Degree	Window				T/B	Switch	Dimension					
			Size	Number	Size	Number								
	L*W*H		L*W	EA	L*W	EA	Max	EA	A	B	C	D	X	H
IND-23	220*330*135	IP65	92*192	1	-	-	-	-	220	330	255	280	12	135
IND-45	400*500*230	IP65	112*96	2	96*48	4	200A	24	400	500	460	400	15	230
			105*24	2	80*20	2								
IND-35	340*500*215	IP66	96*48	8	72*36	10	20A	24	340	500	380	370	15	215
			215*115	1	-	-								
IND-46	400*600*240	IP66	72*72	6	105*24	5	20A	28	400	600	460	500	15	240
			80*20	5	-	-								
IND-57	500*700*290	IP66	96*48	27	72*72	6	10A	77	500	700	565	600	15	290
			105*24	6	80*20	6								
IND-68	600*800*300	IP66	96*48	27	72*72	6	20A	77	600	800	660	660	18	300
			105*24	6	80*20	6								

Hub Type Q'ty

Model	Max. Hub Q'ty (PF, NPT, Metric)									
	Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
IND-23	Top&Bottom	5	4	3	2	2	1	1	-	-
	Left&Right	6	5	5	3	3	2	2	-	-
IND-45	Top&Bottom	14	13	11	5	4	4	3	2	-
	Left&Right	18	16	13	8	6	5	3	3	-
IND-35	Top&Bottom	7	7	8	4	3	-	-	-	-
	Left&Right	12	12	14	8	5	-	-	-	-
IND-46	Top&Bottom	14	13	11	4	4	4	3	2	-
	Left&Right	22	18	16	9	7	6	5	4	-
IND-57	Top&Bottom	27	24	20	11	11	9	7	3	-
	Left&Right	38	35	29	17	15	11	9	4	-
IND-68	Top&Bottom	32	29	16	13	11	6	4	4	-
	Left&Right	44	39	22	18	16	8	5	5	-