Product	Flameproof Type (내압) Dustproof Type (분진) Indicator Box (IIB+H2)
Model	Flameproof Type / 내압 IND-2 IND-34 IND-3 IND-56 Dustproof Type / 분진 IND-TD-2



Protection Tech. & Hazard Area Classification

Ex d IIB+H2 T6 IP65 or IP66 for Zone 1/2

Ex tD A21 IP65 T85℃ for Zone 21/22


Ordering Information

IND · ___ · **

Size 크기	220x330	300x300	300x400	500x600
	2	3	34	56
Principle 방폭구분	Flameproof (d / Gas - IIB+H2)		Dustproof (tD / Dust - A21)	
	(Blank)		TD (IND-TD-2 Only)	
Type 종류	Indicator Box			
	IND			

Component : PB, PBL, PL, SS, EM, BZ, VL, AM

Drawing

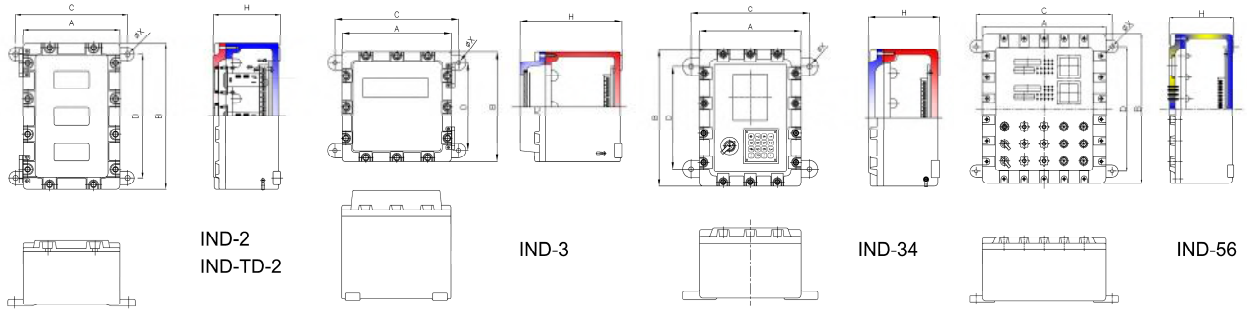

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 600 Vac
Sunshade Cover	STS 304 / EGI	Rated Frequency	50/60 Hz

Box Specification

Model	Box Size	IP Degree	Window				T/B	Switch	Dimension					
			Size	Number	Size	Number								
	L*W*H		L*W	EA	L*W	EA	Max	EA	A	B	C	D	X	H
IND-2 IND-TD-2	220*330*150	IP65	48*48	3	96*48	3	20A	-	220	330	255	280	12	150
IND-3	300*300*280	IP65	180*50	1	96*48	2	20A	6	300	300	340	240	12	280
IND-34	300*400*210	IP66	102*135	1	-	-	-	1	300	400	350	300	15	205
IND-56	500*600*260	IP66	72*72	12	105*24	5	200A	35	500	600	550	500	15	260
			80*20	5	48*48	6								

Hub Type Q'ty

Model	Hub Type	Max. Hub Q'ty (PF, NPT, Metric)								
		1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
IND-2 IND-TD-2	Top&Bottom	4	4	3	3	2	1	-	-	-
	Left&Right	6	5	5	4	3	2	-	-	-
IND-3	Top&Bottom	10	9	7	4	3	3	2	2	-
	Left&Right	10	9	7	4	3	3	2	2	-
IND-34	Top&Bottom	10	9	7	4	3	3	2	2	-
	Left&Right	14	13	11	5	4	4	3	3	-
IND-56	Top&Bottom	26	23	13	11	9	7	4	3	-
	Left&Right	32	29	15	13	11	9	5	4	-