Product	Flameproof Type (내압) Interlock Controller
Model	FIC-34



Protection Tech. & Hazard Area Classification


Ex db IIB+H2 T6/T5 IP65 for Zone 1/2

Ordering Information

FIC - 34

Size 크기	300x400 34
Type 종류	Flameproof Type Interlock Controller Box FIC

Drawing

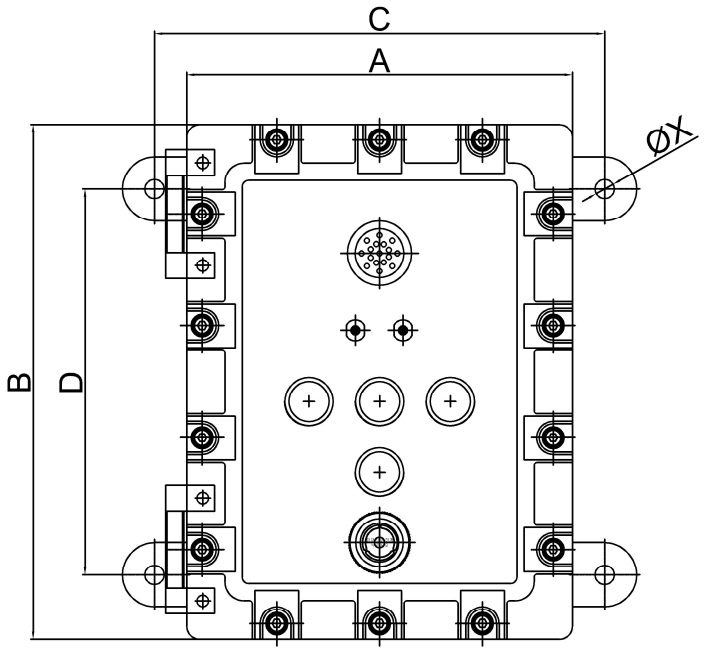

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 440 V (Battery - DC 24V)
Sunshade Cover	STS 304 / EGI	Rated Frequency	50/60 Hz
		Rated Current	Max. 1.2A

Box Specification

Model	Box Size	Dimension					
	L*W*H	A	B	C	D	X	H
FIC-34	300*400*210	300	400	350	300	15	210

Hub Type Q'ty

Model	Max. Hub Q'ty (PF, NPT, Metric)								
	Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
FIC-34	Top&Bottom	10	9	7	4	3	3	2	2	-
	Left&Right	14	13	11	5	4	4	3	3	-