Product	Flameproof Type (내압) Combination Motor Start Box
Model	FCM FCM-1



Protection Tech. & Hazard Area Classification

Ex d IIB+H2 T5 for Zone 1/2 (FCM)
Ex d IIB T5 IP65 for Zone 1/2 (FCM-1)


Ordering Information

FCM - *

Gas Group / IP 가스그룹 및 IP	IIB+H2 (Blank)	IIB / IP65 1
Type 종류	Flameproof Type Combination Motor Start Box FCM	


Component : PB, PBL, PL, SS, EM, BZ, VL, AM

Drawing

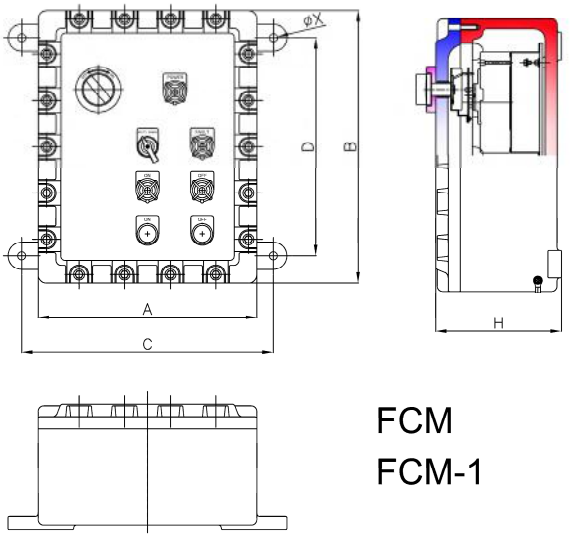

FCM
FCM-1

Wiring Diagram

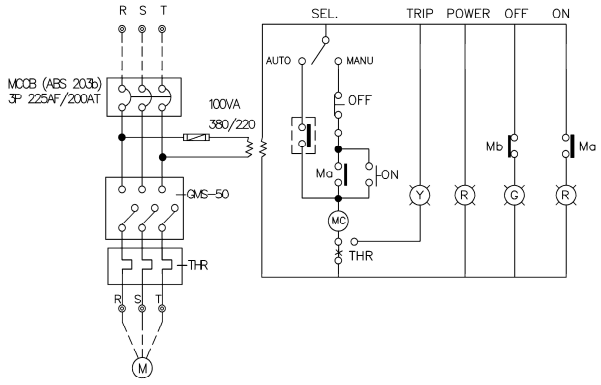

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 600 Vac
Sunshade Cover	STS 304 / EGI	Rated Frequency	50/60 Hz
		Rated Current	Max. 200A

Box Specification

Model	Box Size	Switch	Dimension					
	L*W*H	EA	A	B	C	D	X	H
FCM	400*500*230	20	400	500	460	400	15	230
FCM-1		30						

Hub Type Q'ty

Model	Max. Hub Q'ty (PF, NPT, Metric)									
	Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
FCM FCM-1	Top&Bottom	14	13	11	5	4	4	3	2	-
	Left&Right	18	16	13	6	6	5	4	3	-