Product	Flameproof Type (내압) Exit Lighting
Model	FUFL-S



Protection Tech. & Hazard Area Classification


Ex d IIB+H2 T6 for Zone 1/2

Ordering Information


FUFL-S

Type / Principle 종류 / 방폭구분	Flameproof Type Exit Lighting FUFL-S

Drawing

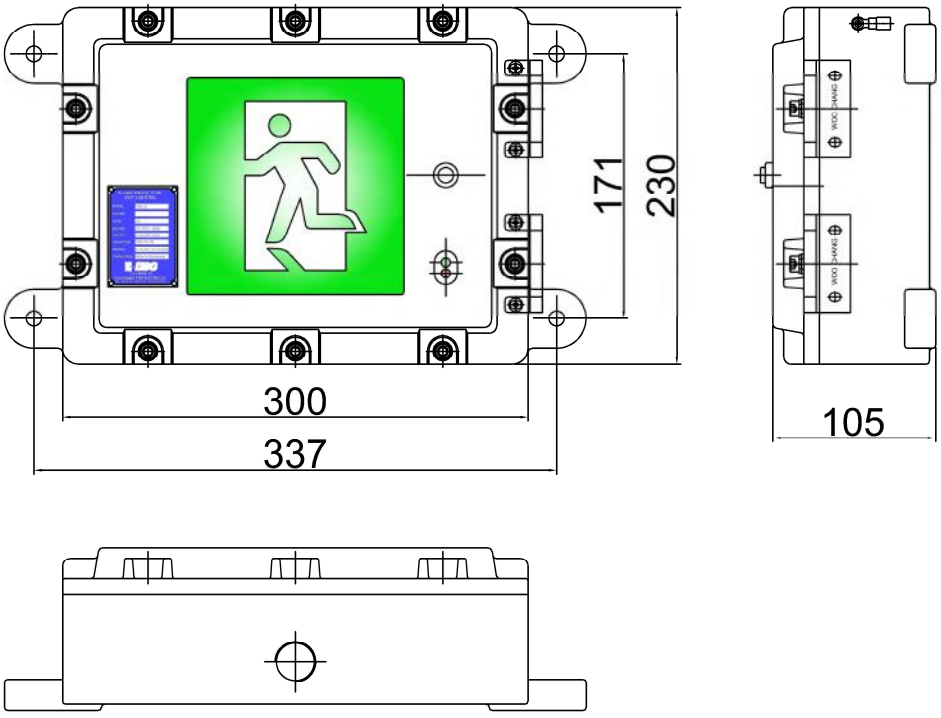

Operating Form & Wiring Diagram

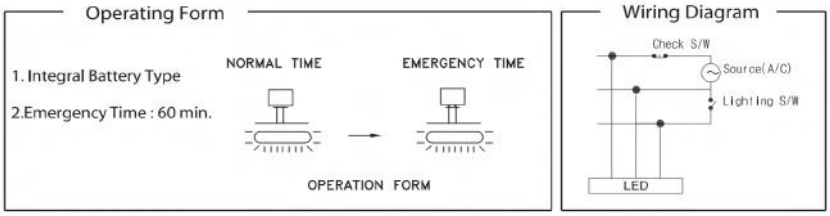

Material (Standard)		Electric (Standard)	
Body	Cast Aluminium Alloy	Rated Voltage	AC 220V / DC 3.6V (Battery 60 min)
Cover	Cast Aluminium Alloy	Rated Frequency	50/60Hz
Glass	Tempered Glass	Rated Current	5A (AC 220V) / 1.3A (DC 3.6V)
Hub	PF 3/4“ (22C)		