Product	Flameproof Type (내압) Supervisory Panel
Model	SVP



Protection Tech. & Hazard Area Classification


Ex db IIB+H2 T6 Gb for Zone 1/2


Ordering Information

SVP

Type / Principle 종류 / 방폭구분	Flameproof Type Supervisory Panel SVP

Drawing & Wiring Diagram

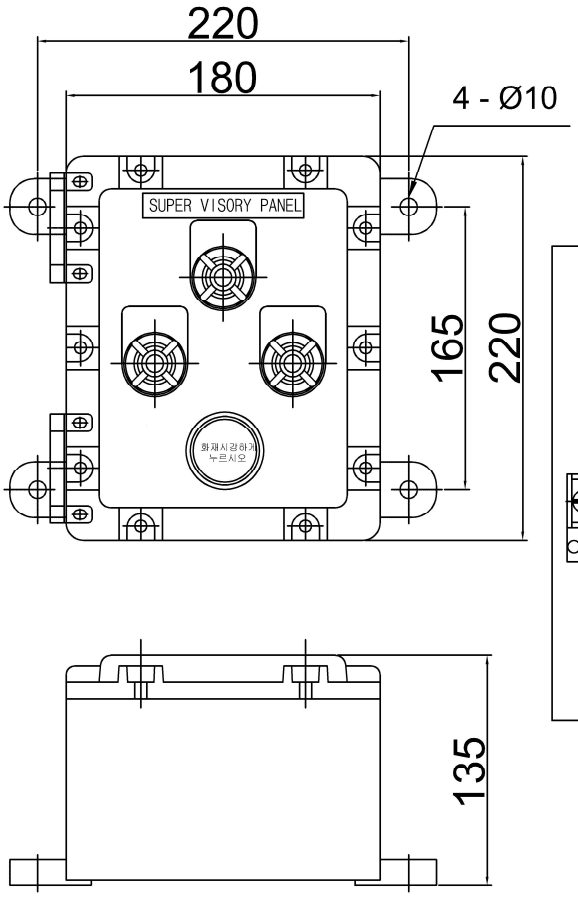

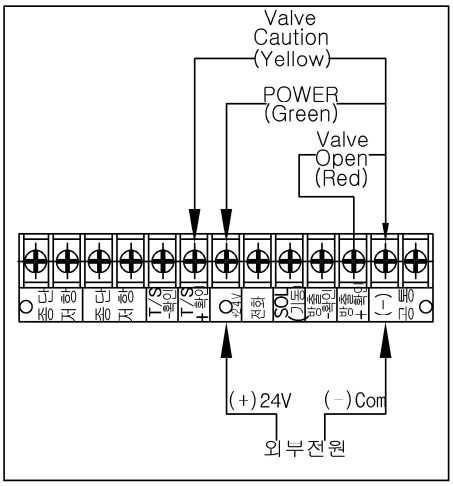

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	DC 24V
Weight	9kg	Rated Frequency	50/60 Hz
		Rated Current	Max. 1A

Max. Hub Q'ty (PF, NPT, Metric)

Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P
Top & Bottom	7	5	3	2