Product	Flameproof Type (내압) Extinguish agent Discharge Lighting
Model	FEDL



Protection Tech. & Hazard Area Classification


Ex db IIB+H2 T6 Gb for Zone 1/2

Ordering Information

FEDL

Type / Principle 종류 / 방폭구분	Flameproof Type Extinguish agent Discharge Lighting FEDL

Drawing

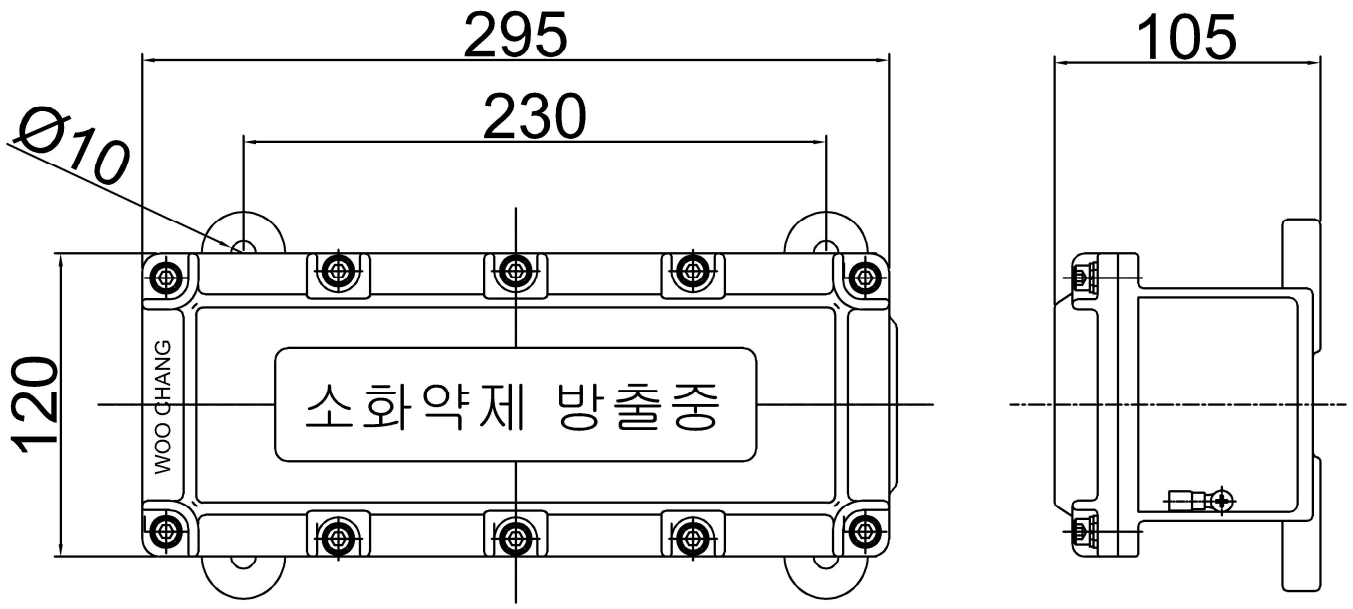

Material (Standard)		Electric (Standard)	
Body	Cast Aluminium Alloy	Rated Voltage	DC 24V
Cover	Cast Aluminium Alloy	Rated Frequency	50/60Hz
Glass	Heat Resistant Hard Glass	Rated Wattage	Max. 10W

Hub

Top	Bottom	Left	Right	Hub Size
Max. 1EA	Max. 1EA	Max. 1EA	Max. 1EA	PF / NPT 1/2“ (16C), M20 x 1.5P
				PF / NPT 3/4“ (22C), M25 x 1.5P