
Product	Increased Safety (안전증) Dustproof Type (분진) Junction Box
Model	WJB-22 WJB-60 WJB-55 WJB-100 WJB-40

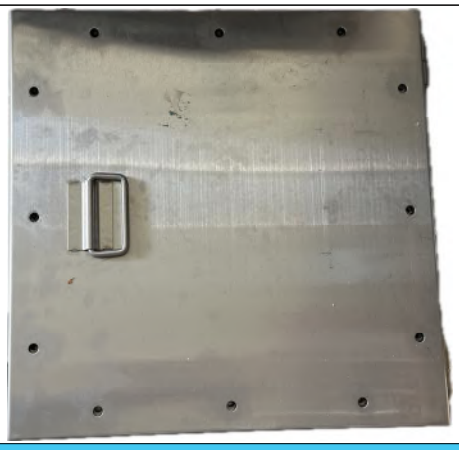

Protection Tech. & Hazard Area Classification


Ex e II T5 IP65 for Zone 1/2 (WJB-40/60/100)
Ex e IIC T5/T6 IP66 for Zone 1/2, Ex tD A21 IP66 T100℃/T85℃ for Zone 21/22 (WJB-22)
Ex e IIC T4/T5 IP66 for Zone 1/2, Ex tD A21 IP66 T135℃/T100℃ for Zone 21/22 (WJB-55)

Ordering Information

WJB - **

Size 크기	250x250	500x500	300x400	400x500	400x600
	22	55	40	60	100
Type 종류	Increased Safety (e / Gas - IIC) Dustproof (tD / Dust - A21) (22, 55 only)				
	Junction Box (STS)				
	WJB				

Drawing

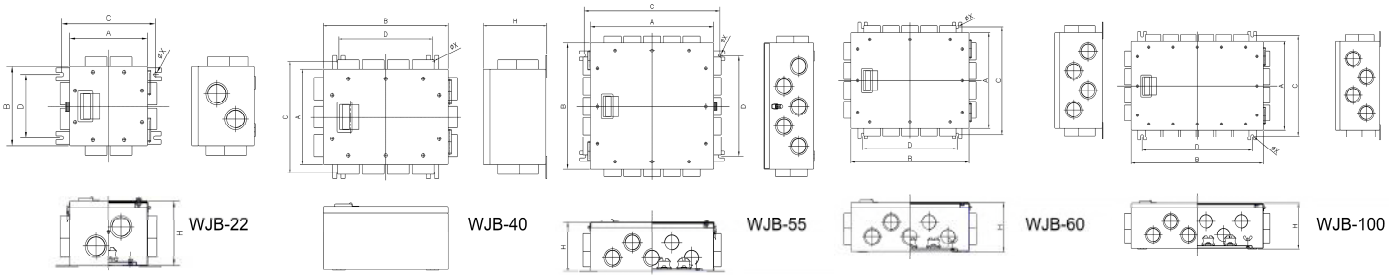

Material (Standard)		Electric (Standard)	
Body & Cover	Stainless Steel	Rated Voltage	Max. 600 Vac
		Rated Frequency	50/60 Hz

Box Specification

Model	Box Size	T/B	Dimension					
	L*W*H	Max	A	B	C	D	X	H
WJB-22	250*250*200	125A	250	250	300	200	11	200
WJB-55	500*500*200	125A	500	500	550	400	11	200
WJB-40	300*400*204	15A	300	400	350	300	12	204
WJB-60	400*500*204	15A	400	500	450	400	15	204
WJB-100	400*600*204	15A	400	600	450	400	15	204

Hub Type Q'ty

Model	Max. Hub Q'ty (PF, NPT, Metric)									
	Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
WJB-22	Top&Bottom	18	16	13	6	6	5	-	-	-
	Left&Right	18	16	13	6	6	5	-	-	-
WJB-55	Top&Bottom	18	16	13	12	11	8	-	-	-
	Left&Right	18	16	13	12	11	8	-	-	-
WJB-40	Top&Bottom	14	13	11	5	4	4	-	-	-
	Left&Right	10	9	7	4	3	3	-	-	-
WJB-60	Top&Bottom	18	16	13	6	6	5	-	-	-
	Left&Right	14	13	11	5	4	4	-	-	-
WJB-100	Top&Bottom	22	20	16	7	7	6	-	-	-
	Left&Right	14	13	11	5	4	4	-	-	-