Product	Flameproof Type (내압) Flexible Coupling
Model	FCX-Series



Protection Tech. & Hazard Area Classification


Ex d IIC for Zone 1/2

Ordering Information

FCX - ** - **

Length 길이	L (제조사 문의)	
Thread 나사산	Max. 1"	16 22 28 36 42 54 70 82 104
	Max. 2"	
	Max. 4"	
Type 종류	Flameproof Type Flexible Coupling	
	FCX	

Drawing

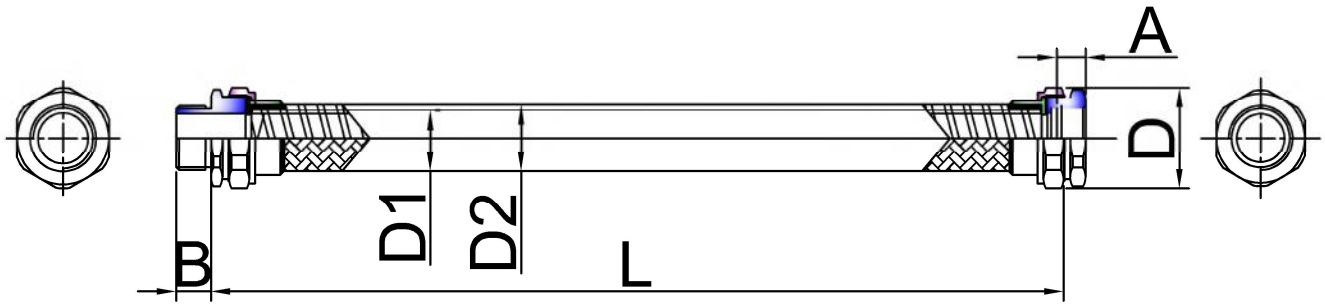

Material (Standard)

Flexible Tube	Stainless Steel
End Fitting	Brass, Stainless Steel
Finish	Ni-Plated Chromate Finish

Specification

Model	Thread (PF / NPT)		Dimension				
	Male	Female	A	B	D	d1	d2
FCX-16	1/2" (16C)	1/2" (16C)	16	17	38	13.4	20
FCX-22	3/4" (22C)	3/4" (22C)	16	17	46	19.1	27.1
FCX-28	1" (28C)	1" (28C)	19	21	54	25.4	34.8
FCX-36	1-1/4" (36C)	1-1/4" (36C)	20	21	65	32.9	42.1
FCX-42	1-1/2" (42C)	1-1/2" (42C)	20	26	78	39.3	49.1
FCX-54	2" (54C)	2" (54C)	23	27	98	51.8	63
FCX-70	2-1/2" (70C)	2-1/2" (70C)	26	31	100	65.2	78
FCX-82	3" (82C)	3" (82C)	30	31	118	76.5	92
FCX-104	4" (104C)	4" (104C)	30	31	154	101	121