Product	Flameproof Type (내압) Dustproof Type (분진) Cable Gland (Packing Type / Aluminium Type)
Model	CG-Series GC-Series



Protection Tech. & Hazard Area Classification

Ex d IIC IP66 for Zone 1/2


Ex tD A21 IP66 for Zone 21/22

Ordering Information

** - **

Thread 나사산	Max. 1"				Max. 2"	
	16	22	28	36	42	54
Type 종류	Packing Type Cable Gland					
	Flameproof (db / Gas - IIC) & Dustproof (tD / Dust - A21)					
	CG				GC	

Drawing

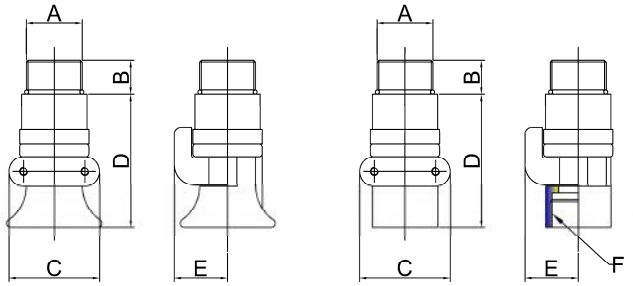

CG TYPE GC TYPE

Material (Standard)

Body	Cast Aluminium Alloy

Specification - CG

Model	Cable Dia. (mm)	Weight (kg)	Thread (A)	Dimension			
				B	C	D(Max.)	E
CG-16	6~8	0.1	PF/NPT 1/2" (16C) M20 x 1.5P	18	46	73	24
CG-22	11~13	0.15	PF/NPT 3/4" (22C) M25 x 1.5P	18.5	48.5	86.5	26.5
CG-28	18~20	0.2	PF/NPT 1" (28C) M32 x 1.5P	23	59	92.5	28
CG-36	21~23	0.35	PF/NPT 1-1/4" (36C) M40 x 1.5P	25	66	99	40
CG-42	32~34	0.9	PF/NPT 1-1/2" (42C) M50 x 1.5P	26	85	151	50
CG-54	43~45	1.15	PF/NPT 2" (54C) M63 x 1.5P	27	93	167	54.5

Specification - GC

Model	Cable Dia. (mm)	Weight (kg)	Thread		Dimension			
			A	B	C	D	E(Max.)	F
GC-16	6~8	0.15	PF/NPT 1/2" (16C) M20 x 1.5P		18	46	73	24
GC-22	11~13	0.2	PF/NPT 3/4" (22C) M25 x 1.5P		18.5	48.5	86.5	26.5
GC-28	18~20	0.25	PF/NPT 1" (28C) M32 x 1.5P		23	59	92.5	28
GC-36	21~23	0.4	PF/NPT 1-1/4" (36C) M40 x 1.5P		25	66	99	40
GC-42	32~34	0.9	PF/NPT 1-1/2" (42C) M50 x 1.5P		26	85	151	50
GC-54	43~45	1.4	PF/NPT 2" (54C) M63 x 1.5P		27	93	167	54.5