Product	Flameproof Type (내압) Sealing Fitting
Model	FV-Series (Vertical Type) SFH-Series (Horizontal Type)



Protection Tech. & Hazard Area Classification


Ex d IIC for Zone 1/2
(FV : IP66)

Ordering Information

__ - **

Thread 나사산	Max. 1"				Max. 2"	
	16	22	28	36	42	54
Type 종류	Flameproof Type Sealing Fitting					
	Vertical (IP66)			Horizontal		
	FV			SFH		

Drawing

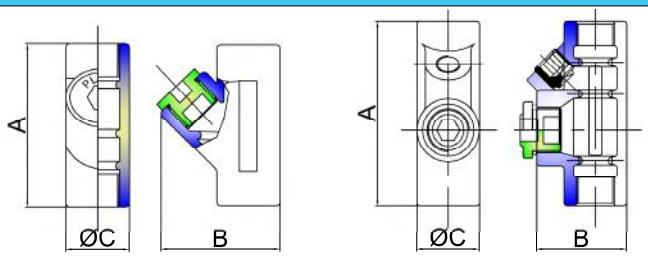

FV-Series SFH-Series

Material (Standard)

Body	Cast Iron (Hot Dip. Galvanized)

Specification - FV

Model	Thread	Weight (kg)	Compound Weight (g)	Dimension		
				A	B	ΦC
FV-16	PF/NPT 1/2" (16C)	0.35	50	83.3	61	32.5
FV-22	PF/NPT 3/4" (22C)	0.5	70	98	72	38.3
FV-28	PF/NPT 1" (28C)	0.7	120	105	82	45.5
FV-36	PF/NPT 1-1/4" (36C)	1	210	125	99	56
FV-42	PF/NPT 1-1/2"(42C)	1.25	250	144	114.5	62
FV-54	PF/NPT 2" (54C)	2.12	400	161.5	136.5	77

Specification - SFH

Model	Thread	Weight (kg)	Compound Weight (g)	Dimension		
				A	B	ΦC
SFH-16	PF/NPT 1/2" (16C)	0.4	50	94	46	32
SFH-22	PF/NPT 3/4" (22C)	0.5	70	96.5	50	38.5
SFH-28	PF/NPT 1" (28C)	0.85	120	120.5	64	45.5
SFH-36	PF/NPT 1-1/4" (36C)	1.15	210	135.5	74.5	56.5
SFH-42	PF/NPT 1-1/2"(42C)	1.35	250	145.5	80	62
SFH-54	PF/NPT 2" (54C)	2.15	400	164.5	96.5	77.5