Product	Increased Safety Type (안전증) Elbow
Model	SR-Series ST-Series



Protection Tech. & Hazard Area Classification


Ex e II for Zone 1/2

Ordering Information


**** - ****

Thread 나사산	Max. 1"				Max. 2"		
	16	22	28	36	42	54	
Type 종류	Increased Safety Type Elbow						
	SR				ST		

Drawing

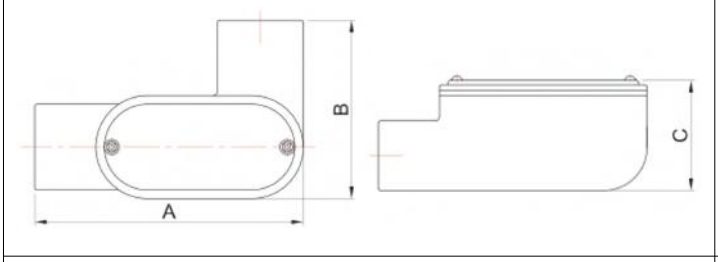

SR

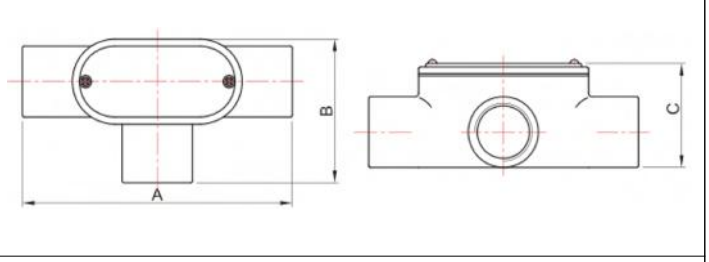

ST

Material (Standard)

Body	Cast Iron (Hot Dip. Galvanized)

Specification - SR

Model	Thread	Weight (kg)	Dimension		
			A	B	C
SR-16	PF 1/2" (16C)	0.45	124	60	45
SR-22	PF 3/4" (22C)	0.65	133	64	52
SR-28	PF 1" (28C)	1.1	163	67	60
SR-36	PF 1-1/4" (36C)	1.5	173	92	77
SR-42	PF 1-1/2"(42C)	2	193	100	81
SR-54	PF 2" (54C)	2.9	216	112	100

Specification - ST

Model	Thread	Weight (kg)	Dimension		
			A	B	C
ST-16	PF 1/2" (16C)	0.45	143	59	46.5
ST-22	PF 3/4" (22C)	0.7	156	67.5	51
ST-28	PF 1" (28C)	1.2	186	80	62
ST-36	PF 1-1/4" (36C)	1.55	197	99	77
ST-42	PF 1-1/2"(42C)	2.15	217	102	80.5
ST-54	PF 2" (54C)	3.25	247	112	98.5