Product	Flameproof Type (내압) Dustproof Type (분진) Cable Gland (Packing Type / Brass or STS Type)
Model	SS-Series



Protection Tech. & Hazard Area Classification


Ex d IIC IP66 for Zone 1/2
Ex tD A21 IP66 for Zone 21/22

Ordering Information

SS - **

Thread 나사산	Max. 1"				Max. 2"	
	16	22	28	36	42	54
Type 종류	Packing Type Cable Gland					
	Flameproof (db / Gas - IIC) & Dustproof (tD / Dust - A21)					
	SS					

Drawing

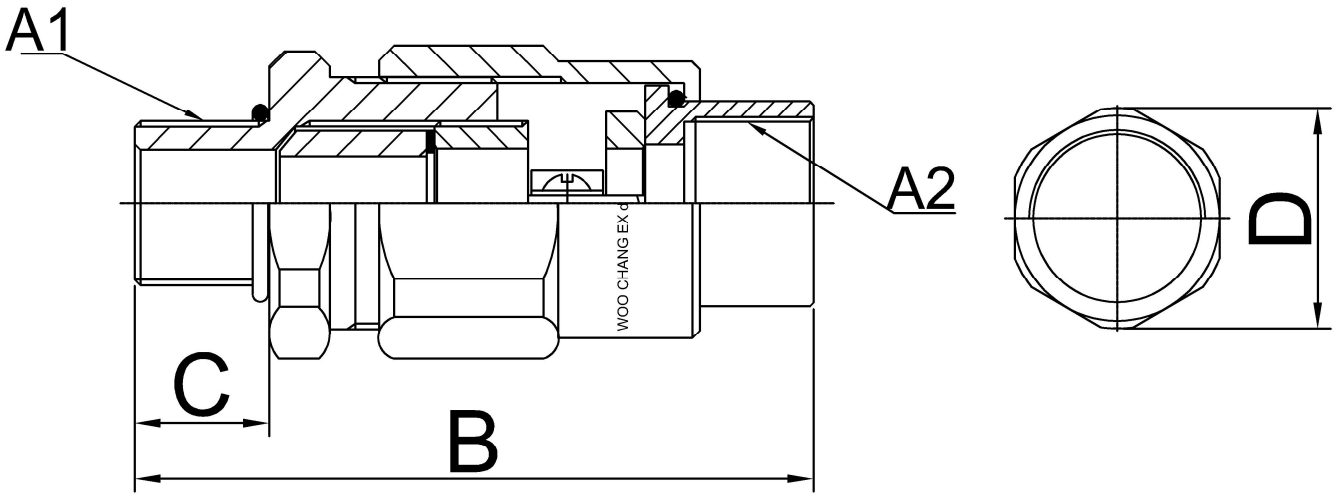

Material (Standard)

Body	Brass or Stainless Steel

Specification

Model	Cable Dia. (mm)	Weight (kg)	Thread		Dimension		
			A1	A2	B	C	D
SS-16	7~11	0.25	PF/NPT 1/2" (16C) M20 x 1.5P		76	15.9	37
SS-22	10~15	0.3	PF/NPT 3/4" (22C) M25 x 1.5P		80	16.6	41.2
SS-28	14~20	0.5	PF/NPT 1" (28C) M32 x 1.5P		92	19.9	50
SS-36	18~22	0.65	PF/NPT 1-1/4" (36C) M40 x 1.5P		98.5	20.6	58
SS-42	23~28	0.9	PF/NPT 1-1/2" (42C) M50 x 1.5P		110	26	67
SS-54	27~32	1.2	PF/NPT 2" (54C) M63 x 1.5P		113	26	79