Product	Flameproof Type (내압) Union Coupling
Model	UX-Series (Male / Female Type)



Protection Tech. & Hazard Area Classification


Ex d IIC for Zone 1/2

Ordering Information


UX - * *

Thread Size 나사산 크기	1/2"(16C)	3/4"(22C)	1"(28C)	1-1/4"(36C)	1-1/2"(42C)	2"(54C)
	0	1	2	3	4	5
Thread Type 나사 형태	Male Type				Female Type	
	1				2	
Type 종류	Flameproof Type Union Coupling					
	UX					

Drawing

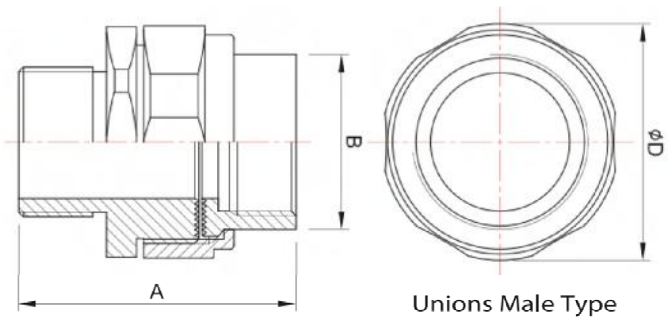

Unions Male Type

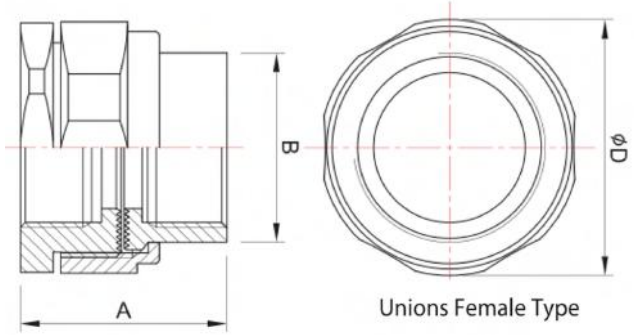

Unions Female Type

Material (Standard)

Body	Steel

Specification - Male Type

Model	Thread	Weight (kg)	Dimension		
			A	B	ΦD
UX-10	PF/NPT 1/2" (16C)	0.15	49.5	24	35.6
UX-11	PF/NPT 3/4" (22C)	0.25	52.5	34	43.6
UX-12	PF/NPT 1" (28C)	0.35	58.6	38	51.7
UX-13	PF/NPT 1-1/4" (36C)	0.5	63.4	48	62
UX-14	PF/NPT 1-1/2"(42C)	0.6	79	54	68
UX-15	PF/NPT 2" (54C)	0.9	77	68	84.5

Specification - Female Type

Model	Thread	Weight (kg)	Dimension		
			A	B	ΦD
UX-20	PF/NPT 1/2" (16C)	0.15	35.5	24	35.6
UX-21	PF/NPT 3/4" (22C)	0.2	38.5	34	43.6
UX-22	PF/NPT 1" (28C)	0.3	44	38	51.7
UX-23	PF/NPT 1-1/4" (36C)	0.45	45.5	48	62
UX-24	PF/NPT 1-1/2"(42C)	0.6	53.5	54	68
UX-25	PF/NPT 2" (54C)	0.85	57	68	84.5