Product	Flameproof Type (내압) Dustproof Type (분진) Socket
Model	WCSK-1 XS-Series



Protection Tech. & Hazard Area Classification

Ex d IIC IP66 for Zone 1/2


Ex tD A21 IP66 for Zone 21/22 (WCSK-1 Only)

Ordering Information

____ - *

Thread 나사산	1/2"(16C)	3/4"(22C)	1"(28C)	1-1/4"(36C)	1-1/2"(42C)	2"(54C)
	1			2		
Type 종류	Socket					
	Flameproof (d / Gas - IIC) & Dustproof (tD / Dust - A21)			Flameproof (d / Gas -IIC)		
	WCSK			XS		

Drawing

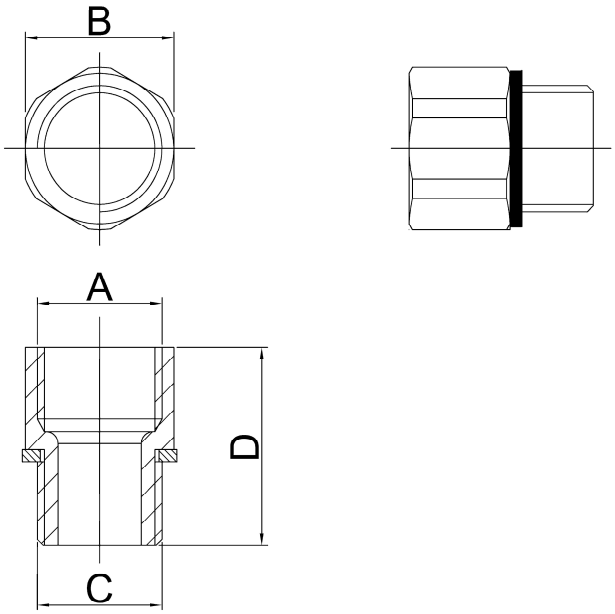

Material (Standard)

Body	Steel(Zn-Plated)

Specification

Model	Thread A	Thread C	Dimension B	Dimension D
WCSK-1	PF/NPT 1/2" (16C) M20 x 1.5P	PF/NPT 1/2" (16C) M16 x 1.5P M20 x 1.5P	25	31
	PF/NPT 3/4" (22C) M25 x 1.5P	PF/NPT 1/2" (16C) PF/NPT 3/4" (22C) M16 x 1.5P M20 x 1.5P M25 x 1.5P	30	35
	PF/NPT 1" (28C) M32 x 1.5P	PF/NPT 1/2" (16C) PF/NPT 3/4" (22C) PF/NPT 1" (28C) M16 x 1.5P M20 x 1.5P M25 x 1.5P M32 x 1.5P	38	38.5

Model	Thread A	Thread C	Dimension B	Dimension D
XS-1	PF/NPT 1-1/4" (36C) M40 x 1.5P	PF/NPT 3/4" (22C) M25 x 1.5P	46	44
	PF/NPT 1-1/4" (36C) M40 x 1.5P	PF/NPT 1" (28C) M32 x 1.5P	46	44
	PF/NPT 1-1/2" (42C) M50 x 1.5P		58	44
XS-2	PF/NPT 1-1/2" (42C) M50 x 1.5P	PF/NPT 1-1/4" (36C) M40 x 1.5P	54	44
	PF/NPT 2" (54C) M63 x 1.5P		67	46
	PF/NPT 2" (54C) M63 x 1.5P	PF/NPT 1-1/2" (42C) M50 x 1.5P	67	46
	PF/NPT 2-1/2" (70C) M75 x 1.5P		82	48
	PF/NPT 2-1/2" (70C) M75 x 1.5P	PF/NPT 2" (54C) M63 x 1.5P	82	48
	PF/NPT 3" (82C) M90 x 1.5P		95	56