Product	Increased Safety Type (안전증) Elbow
Model	SB-Series SL-Series



Protection Tech. & Hazard Area Classification


Ex e II for Zone 1/2

Ordering Information


**** - ****

Thread 나사산		Max. 1"				Max. 2"	
		16	22	28	36	42	54
Type 종류		Increased Safety Type Elbow					
		SB				SL	

Drawing

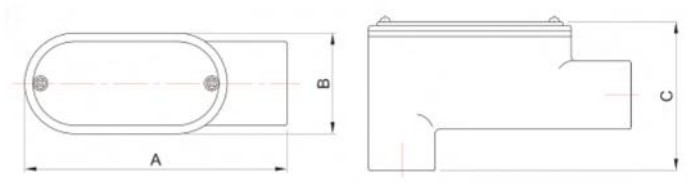

SB

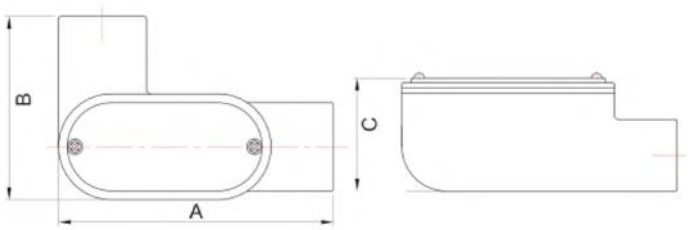

SL

Material (Standard)

Body	Cast Iron (Hot Dip. Galvanized)

Specification - SB

Model	Thread	Weight (kg)	Dimension		
			A	B	C
SB-16	PF 1/2" (16C)	0.45	124	40	66.5
SB-22	PF 3/4" (22C)	0.6	134	44	74
SB-28	PF 1" (28C)	1.15	160	58	89.5
SB-36	PF 1-1/4" (36C)	1.4	172	67	103
SB-42	PF 1-1/2"(42C)	1.9	191	75	112.5
SB-54	PF 2" (54C)	2.7	216	84	126.5

Specification - SL

Model	Thread	Weight (kg)	Dimension		
			A	B	C
SL-16	PF 1/2" (16C)	0.45	124	60	45
SL-22	PF 3/4" (22C)	0.65	133	64	52
SL-28	PF 1" (28C)	1.1	161	87	60
SL-36	PF 1-1/4" (36C)	1.5	173	92	77
SL-42	PF 1-1/2"(42C)	2	193	100	81
SL-54	PF 2" (54C)	2.9	216	112	100