Product	Flameproof Type (내압) Junction Box (IIC)
Model	FJG-10 FJG-60 FJG-20 FJG-100 FJG-40



Protection Tech. & Hazard Area Classification


Ex d IIC T6 IP65 for Zone 1/2

Ordering Information

FJG · **

Size 크기	165x178 10	190x205 20	300x300 40	400x500 60	500x550 100
Type 종류	Flameproof Type Junction Box (IIC) FJG				

Drawing

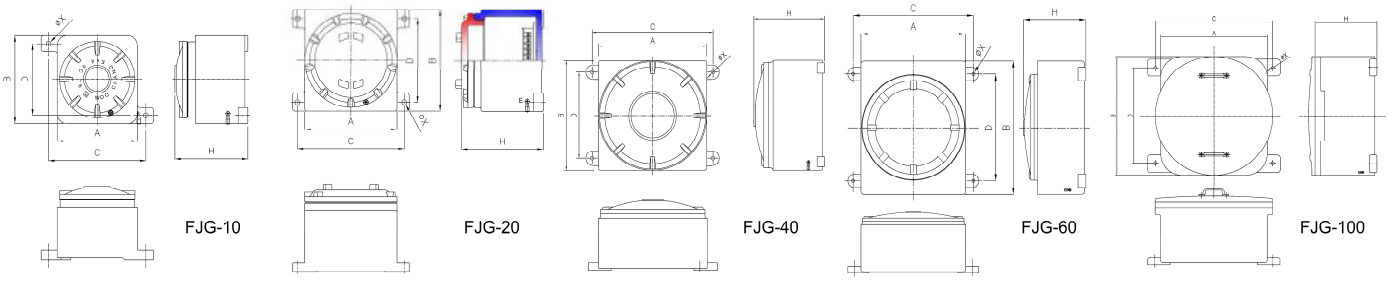

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 600 Vac
		Rated Frequency	50/60 Hz

Box Specification

Model	Box Size	T/B	Dimension					
	L*W*H	Max	A	B	C	D	X	H
FJG-10	165*178*150	20A	165	178	200	145	10	150
FJG-20	190*205*180	20A	190	205	220	170	10	180
FJG-40	300*300*195	20A	300	300	340	240	10	195
FJG-60	400*500*230	200A	400	500	460	400	12	230
FJG-100	500*550*320	200A	500	550	550	440	15	320

Hub Type Q'ty

Model	Max. Hub Q'ty (PF, NPT, Metric)									
	Hub Type	1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
FJG-10	Top&Bottom	5	4	-	-	-	-	-	-	-
	Left&Right	5	5	-	-	-	-	-	-	-
FJG-20	Top&Bottom	9	6	5	3	2	2	-	-	-
	Left&Right	9	6	5	3	2	2	-	-	-
FJG-40	Top&Bottom	15	14	8	7	3	3	-	-	-
	Left&Right	15	12	8	7	3	3	-	-	-
FJG-60	Top&Bottom	13	11	7	5	3	3	-	-	-
	Left&Right	13	11	7	5	3	3	-	-	-
FJG-100	Top&Bottom	20	14	11	8	5	5	-	-	-
	Left&Right	20	14	11	8	5	5	-	-	-